

STAT 545

LINEAR MODELS

Conditional expectation **linear in parameters**.

$$E(Y|X_1, X_2) = \beta_0 + \beta_1 X_1 + \beta_2 X_2$$

$$E(Y|X_1, X_2) = \beta_0 + \beta_1 X_1^3 + \beta_2 X_1 X_2$$

$$E(Y|X_1, X_2) = \beta_0 + \beta_1 I_{\{X_1 > 0\}}$$

$$E(Y|X_1, X_2) = \beta_0 + \beta_1 \exp(X_1) + \beta_2 X_2$$

But not

$$E(Y|X_1, X_2) = \beta_0 + \beta_1 X_1 + \exp(-\beta_2 X_2)$$

Notation

Repeated realizations of $(Y, X_1, \dots, X_p)$, where

$$Y|X_1, \dots, X_p \sim N(\beta_0 + \beta_1 X_1 + \dots + \beta_p X_p, \sigma^2)$$

Or $i = 1, \dots, n$ indexes observations, $j = 1, \dots, p$ indexes predictors, observe vector of responses Y (entries Y_i) and **design matrix** X (entries X_{ij}).

$$Y|X \sim N_n(X\beta, \sigma^2 I_n).$$

ML/LS estimator: $\hat{\beta} = \operatorname{argmin}_{\beta} \|Y - X\beta\|^2 = (X^T X)^{-1} X^T Y$.


NOTE UBIQUITY OF DESIGN MATRIX, RESPONSE VECTOR
FORMULATION: linear regression, multiple linear regression,
ANOVA, curve-fitting,....

Software: `lm()` function.

```
> tmp <- lm(y~x)
> coef(tmp)      ### or tmp$coef
> resid(tmp)     ### or tmp$resid
> fitted(tmp)    ### or tmp$fitted
```

Simple Example

```
> attach(whiteside)
> plot(Temp, Gas, pch=as.numeric(Insul),
        col=1+as.numeric(Insul))
> tmp1 <- lm(Gas~Temp, data=whiteside,
             subset=Insul=="Before")
> abline(tmp1, col=2)
...
> names(tmp1)
[1] "coefficients" "residuals"      "effects"
[4] "rank"         "fitted.values"  "assign"
[7] "qr"           "df.residual"    "xlevels"
[10] "call"         "terms"          "model"
```

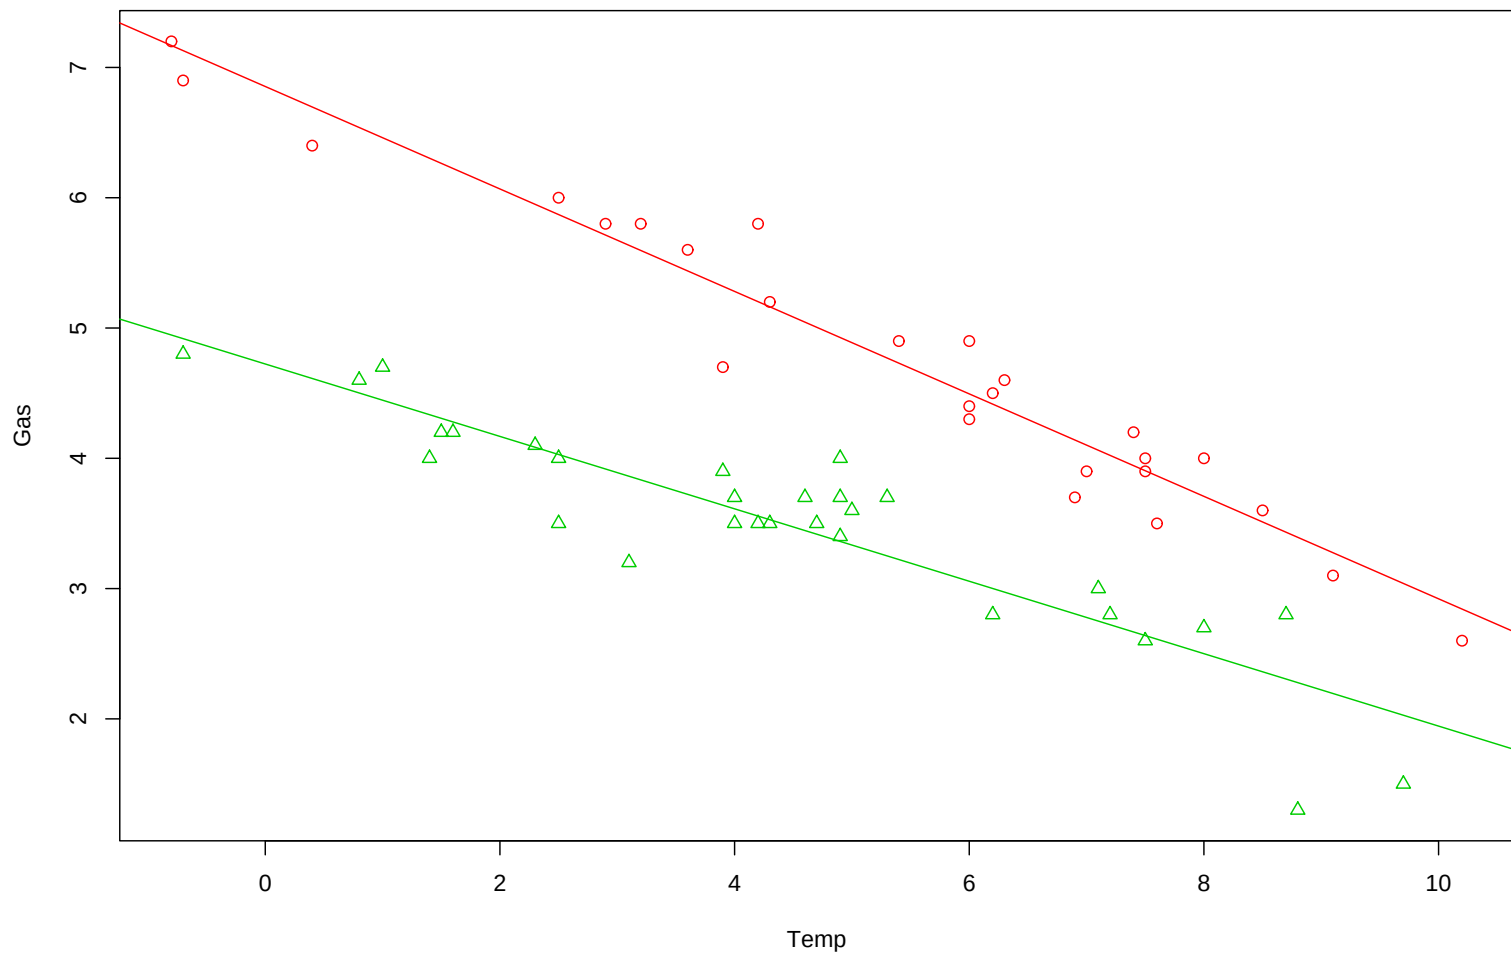

```

> summary(tmp1)
Call:
lm(formula = Gas ~ Temp, data = whiteside, subset = ...
Residuals:
      Min       1Q   Median       3Q      Max
-0.62020 -0.19947  0.06068  0.16770  0.59778
Coefficients:
              Estimate Std. Error t value Pr(>|t|)
(Intercept)  6.85383     0.11842   57.88  <2e-16 ***
Temp        -0.39324     0.01959  -20.08  <2e-16 ***
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 ...

Residual standard error: 0.2813 on 24 degrees of freedom
Multiple R-Squared: 0.9438,    Adjusted R-squared: 0.9415
F-statistic: 403.1 on 1 and 24 DF,  p-value: < 2.2e-16

```

Model Formulae

```
fake.data <- cbind(  
  data.frame("y"=rnorm(54)), data.frame("x1"=rnorm(54)),  
  data.frame("x2"=rnorm(54)),  
  data.frame("a"=factor(c(rep("ubc",18),rep("sfu",18),  
    rep("vic",18)), levels=c("ubc","sfu","vic"))),  
  data.frame("b"=ordered(rep(c(rep("sm",3),rep("md",3),  
    rep("lg",3)),6), levels=c("sm","md","lg"))),  
  data.frame("c"=factor(rep(c("rd","gr","bl"),18),  
    levels=c("rd","gr","bl"))) )
```

```

> print(fake.data)
      y      x1      x2   a   b   c
1 -0.288 -0.109  1.486 ubc sm rd
2 -0.397 -0.862  0.905 ubc sm gr
3  0.179 -1.482 -1.450 ubc sm bl
4 -0.863 -0.457 -0.603 ubc md rd
5  0.926 -0.258  0.733 ubc md gr
6 -0.594  0.739 -0.413 ubc md bl
7  0.729  0.704 -0.384 ubc lg rd
8 -0.130  1.661  0.134 ubc lg gr
9  1.734 -1.010 -0.464 ubc lg bl
10 2.012 -0.469  1.085 ubc sm rd
...
52 0.416 -1.903 -0.113 vic lg rd
53 0.579 -1.294  0.975 vic lg gr
54 0.567  1.380 -0.953 vic lg bl

```



```
> opt <- lm(y ~ x1 +x2, data=fake.data)
> summary(opt)
```

Call:

```
lm(formula = y ~ x1 + x2, data = fake.data)
```

Coefficients:

(Intercept)	x1	x2
0.020	0.154	0.018

Call:

```
lm(formula = y ~ -1 + x1 + x2, data = fake.data)
```

Coefficients:

x1	x2
0.158	0.017

Call:

```
lm(formula = y ~ x1 * x2, data = fake.data)
```

Coefficients:

(Intercept)	x1	x2	x1:x2
0.040	0.119	0.042	-0.194

Call:

```
lm(formula = y ~ x1 + x2 + I(x1 * x2), data = fake.data)
```

Coefficients:

(Intercept)	x1	x2	I(x1 * x2)
0.040	0.119	0.042	-0.194

```

> getOption("contrasts")
            unordered            ordered
"contr.treatment"      "contr.poly"

> opt <- lm(y ~ a + c, data=fake.data)
> opt$coef
(Intercept)          asfu          auvic          cgr          cbl
          0.245        -0.359        -0.209         0.044        -0.275

> dummy.coef(opt)
Full coefficients are
(Intercept):          0.24
a:              ubc      sfu      uvic
              0.00    -0.36    -0.21
c:              rd       gr       bl
              0.000    0.044   -0.275

```

```

> options(constrasts= c("contr.sum", "contr.poly"))

> opt <- lm(y ~ a + c, data=fake.data)
> opt$coef
(Intercept)          a1          a2          c1          c2
      -0.022       0.189      -0.170       0.077       0.121

> dummy.coef(opt)
Full coefficients are
(Intercept):      -0.022
a:
      ubc      sfu      uvic
      0.189 -0.170 -0.020
c:
      rd      gr      bl
      0.077  0.121 -0.198

```

```
lm(formula = y ~ ., data = fake.data)
```

Coefficients:

(Intercept)	x1	x2	asfu
0.02083	0.14795	0.00039	0.14433
avic	bmd	blg	cgr
0.12052	-0.08310	0.21444	-0.28178
cbl			
-0.11705			

```
lm(formula = y ~ x1 + x2 + a * b, data = fake.data)
```

Coefficients:

(Intercept)	x1	x2	asfu
-0.2077	0.1461	0.0048	0.1222
avic	bmd	blg	asfu:bmd
0.4268	0.2538	0.1646	-0.0966
avic:bmd	asfu:blg	avic:blg	
-0.9073	0.1664	-0.0115	

```
lm(formula = y ~ x1 + b/x2, data = fake.data)
```

Coefficients:

(Intercept)	x1	bmd	blg
-0.073	0.157	-0.081	0.266
bsm:x2	bmd:x2	blg:x2	
0.181	-0.227	0.019	

```
> opt <- lm(y ~ a * b * c, data = fake.data)
```

```
> names(opt$coef)
```

```
[1] "(Intercept)" "asfu"          "avic"  
[4] "bmd"          "blg"           "cgr"  
[7] "cbl"          "asfu:bmd"      "avic:bmd"  
[10] "asfu:blg"     "avic:blg"      "asfu:cgr"  
[13] "avic:cgr"     "asfu:cbl"      "avic:cbl"  
[16] "bmd:cgr"      "blg:cgr"       "bmd:cbl"  
[19] "blg:cbl"      "asfu:bmd:cgr"  "avic:bmd:cgr"  
[22] "asfu:blg:cgr" "avic:blg:cgr"  "asfu:bmd:cbl"  
[25] "avic:bmd:cbl" "asfu:blg:cbl"  "avic:blg:cbl"
```